


CADENA DE RODILLOS DOBLE PASO O PASO ALARGADO

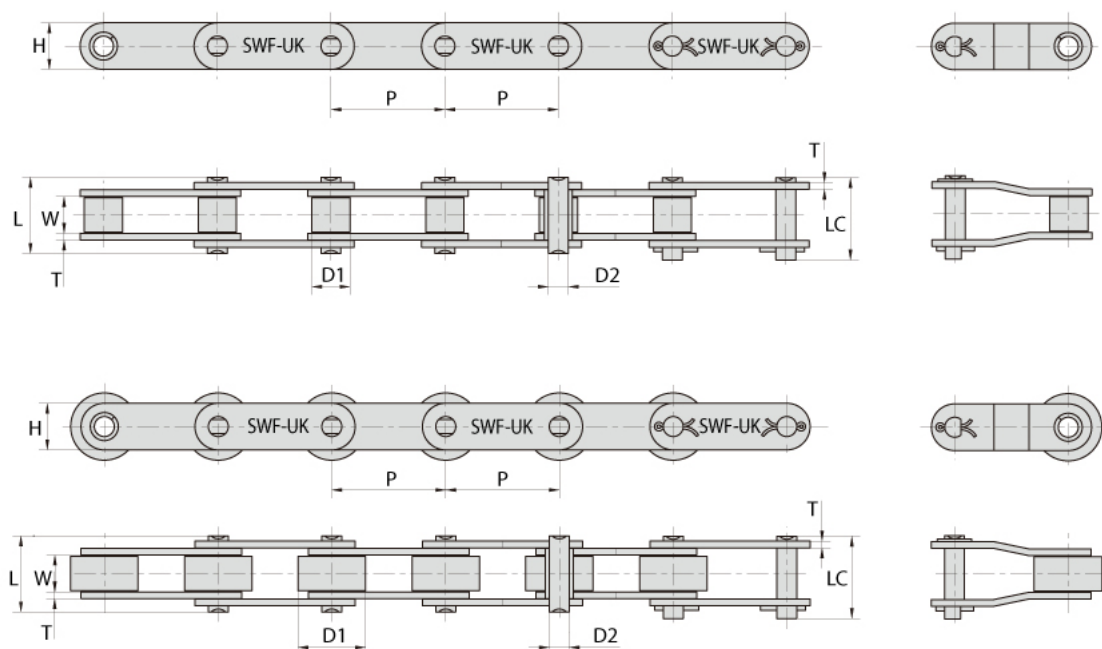

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga Admisible	Carga de Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Long.	Long. Máx.			
	in	mm	mm	mm	H (mm)	T (mm)	D2 (mm)	L (mm)	LC (mm)			
C2040	1"	25.40	7.85	7.95	12	1.50	3.96	16.6	17.8	1438	1703	0.50
C2042				15.88								0.84
C2040H	1"	25.40	7.85	7.95	12	2.03	3.96	18.8	19.9	1438	1754	0.65
C2042H				15.88								1.00
C2050	1 1/4"	31.75	9.40	10.16	15	2.03	5.08	20.7	22.2	2264	2865	0.78
C2052				19.05								1.27
C2060	1 1/2"	38.10	12.57	11.91	18	2.42	5.94	25.9	27.7	3243	3752	1.12
C2062				22.23								1.61
C2060H	1 1/2"	38.10	12.57	11.91	18	3.25	5.94	29.2	31.6	3243	4242	1.44
C2062H				22.23								2.07
C2080	2"	50.80	15.75	15.88	24	3.25	7.92	32.7	36.5	5782	6699	2.08
C2082				28.58								3.12
C2080H	2"	50.80	15.75	15.88	24	4.00	7.92	36.2	39.4	5782	7138	2.54
C2082H				28.58								3.58

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.