


CADENAS DE RODILLOS DR - ANTICORROSIVAS

CADENA BAÑADA EN DRACOMET® - PLATED



ADECUADAS PARA CONDICIONES CORROSIVAS

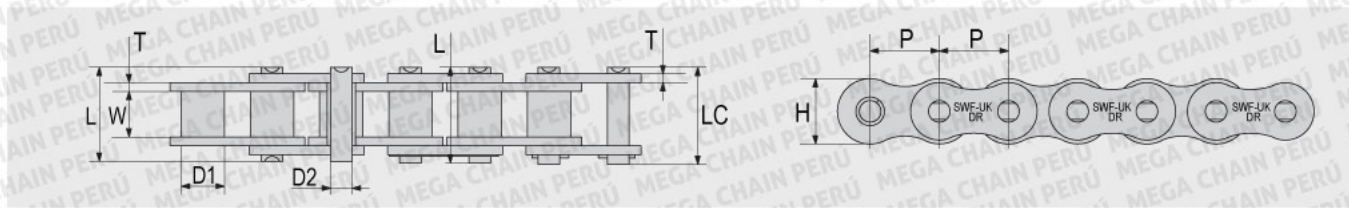

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga Admisible	Carga a la Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Long.	Long. Máx.	kg/m	kg/m	kg/m
	pulgadas	mm	mm	mm	H (mm)	T (mm)	D(mm)	L (mm)	LC (mm)			
25-1 DR	1/4"	6.35	3.18	3.30	6.00	0.80	2.31	7.90	8.40	357	510	0.15
35-1 DR	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	12.40	13.17	806	1152	0.33
41-1 DR	1/2"	12.70	6.25	7.77	9.91	1.30	3.58	13.75	15.00	680	1285	0.41
40-1 DR	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	16.60	17.80	1438	1897	0.62
50-1 DR	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	20.70	22.20	2264	3192	1.02
60-1 DR	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	25.90	27.70	3243	4405	1.50
80-1 DR	1"	25.40	15.75	15.88	24.00	3.25	7.92	32.70	35.00	5782	7576	2.60
100-1 DR	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	40.40	44.70	9024	10972	3.91
120-1 DR	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	50.30	54.30	12950	16631	5.62
140-1 DR	1 3/4"	44.45	25.22	25.40	41.00	5.60	12.70	54.40	59.00	17580	22688	7.50
160-1 DR	2"	50.80	31.55	28.58	47.80	6.40	14.27	64.80	69.60	23127	27216	10.10
180-1 DR	2 1/4"	57.15	35.48	35.71	53.60	7.20	17.46	72.80	78.60	28572	36821	13.45
200-1 DR	2 1/2"	63.50	37.85	39.68	60.00	8.00	19.85	80.30	87.20	36077	47600	16.15
240-1 DR	3"	76.20	47.35	47.63	72.39	9.50	23.81	95.50	103.00	52035	68483	23.20
25-2 DR	1/4"	6.35	3.18	3.30	6.00	0.80	2.31	14.50	15.00	714	1020	0.27
35-2 DR	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	22.50	23.30	1611	2274	0.69
40-2 DR	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	31.00	32.20	2876	3793	1.27
50-2 DR	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	38.90	40.40	4527	6383	2.07
60-2 DR	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	48.80	50.50	6485	8810	3.04
80-2 DR	1"	25.40	15.75	15.88	24.00	3.25	7.92	62.70	64.30	11563	15153	5.27
100-2 DR	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	76.40	80.50	18049	21944	7.85
120-2 DR	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	95.80	99.70	25900	33263	11.70
140-2 DR	1 3/4"	44.45	25.22	25.40	41.00	5.60	12.70	103.30	107.90	35159	45377	14.83
160-2 DR	2"	50.80	31.55	28.58	47.80	6.40	14.27	123.30	128.10	46254	54432	20.04
180-2 DR	2 1/4"	57.15	35.48	35.71	53.60	7.20	17.46	138.60	144.40	57154	73643	26.52
200-2 DR	2 1/2"	63.50	37.85	39.68	60.00	8.00	19.85	151.90	158.80	72154	95199	32.63
240-2 DR	3"	76.20	47.35	47.63	72.39	9.50	23.81	183.40	190.80	104071	136966	48.10

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.