



CADENAS DE RODILLOS NORMA ASA




CANDADOS





MEDIO PASO



CADENAS REMACHADA



CADENAS CON PASADOR

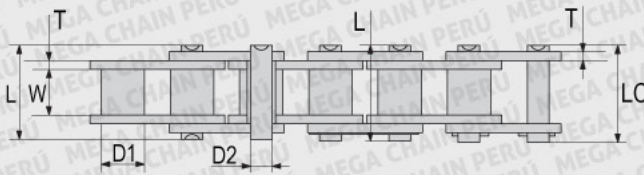

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga Admisible	Carga a la Rotura	Peso Aprox.
	P pulgadas	mm	W mm	D1 mm	Altura H (mm)	Espesor T (mm)	Diámetro D(mm)	Long. L (mm)	Long. Máx. LC (mm)	kg/m	kg/m	kg/m
25-1	1/4"	6.35	3.18	3.30	6.00	0.80	2.31	7.90	8.40	357	510	0.15
35-1	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	12.40	13.17	806	1152	0.33
41-1	1/2"	12.70	6.25	7.77	9.91	1.30	3.58	13.75	15.00	680	1285	0.41
40-1	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	16.60	17.80	1438	1897	0.62
50-1	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	20.70	22.20	2264	3192	1.02
60-1	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	25.90	27.70	3243	4405	1.50
80-1	1"	25.40	15.75	15.88	24.00	3.25	7.92	32.70	35.00	5782	7576	2.60
100-1	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	40.40	44.70	9024	10972	3.91
120-1	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	50.30	54.30	12950	16631	5.62
140-1	1 3/4"	44.45	25.22	25.40	41.00	5.60	12.70	54.40	59.00	17580	22688	7.50
160-1	2"	50.80	31.55	28.58	47.80	6.40	14.27	64.80	69.60	23127	27216	10.10
180-1	2 1/4"	57.15	35.48	35.71	53.60	7.20	17.46	72.80	78.60	28572	36821	13.45
200-1	2 1/2"	63.50	37.85	39.68	60.00	8.00	19.85	80.30	87.20	36077	47600	16.15
240-1	3"	76.20	47.35	47.63	72.39	9.50	23.81	95.50	103.00	52035	68483	23.20
25-2	1/4"	6.35	3.18	3.30	6.00	0.80	2.31	14.50	15.00	714	1020	0.27
35-2	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	22.50	23.30	1611	2274	0.69
40-2	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	31.00	32.20	2876	3793	1.27
50-2	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	38.90	40.40	4527	6383	2.07
60-2	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	48.80	50.50	6485	8810	3.04
80-2	1"	25.40	15.75	15.88	24.00	3.25	7.92	62.70	64.30	11563	15153	5.27
100-2	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	76.40	80.50	18049	21944	7.85
120-2	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	95.80	99.70	25900	33263	11.70
140-2	1 3/4"	44.45	25.22	25.40	41.00	5.60	12.70	103.30	107.90	35159	45377	14.83
160-2	2"	50.80	31.55	28.58	47.80	6.40	14.27	123.30	128.10	46254	54432	20.04
180-2	2 1/4"	57.15	35.48	35.71	53.60	7.20	17.46	138.60	144.40	57154	73643	26.52
200-2	2 1/2"	63.50	37.85	39.68	60.00	8.00	19.85	151.90	158.80	72154	95199	32.63
240-2	3"	76.20	47.35	47.63	72.39	9.50	23.81	183.40	190.80	104071	136966	48.10

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.

CADENAS DE RODILLOS NORMA ASA

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga Admisible	Carga a la Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Long.	Long. Máx.	kg/m	kg/m	kg/m
	pulgadas	mm	mm	mm	H (mm)	T (mm)	D(mm)	L (mm)	LC (mm)			
25-3	1/4"	6.35	3.18	3.30	6.00	0.80	2.31	21.00	21.50	1071	1530	0.44
35-3	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	32.70	33.50	2417	3457	1.05
40-3	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	45.40	46.60	4313	5690	1.90
50-3	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	57.00	58.50	6791	9575	3.09
60-3	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	71.50	73.30	9728	13215	4.54
80-3	1"	25.40	15.75	15.88	24.00	3.25	7.92	91.70	93.60	17345	22729	7.89
100-3	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	112.20	116.30	27073	32916	11.77
120-3	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	141.40	145.20	38851	49894	17.53
140-3	1 3/4"	44.45	25.22	25.40	41.00	5.60	12.70	152.20	156.80	52739	68065	22.20
160-3	2"	50.80	31.55	28.58	47.80	6.40	14.27	181.80	186.60	69380	81647	30.02
180-3	2 1/4"	57.15	35.48	35.71	53.60	7.20	17.46	204.40	210.20	85726	110464	38.22
200-3	2 1/2"	63.50	37.85	39.68	60.00	8.00	19.85	223.50	230.40	108231	142799	49.02
240-3	3"	76.20	47.35	47.63	72.39	9.50	23.81	271.30	278.60	156106	205449	71.60
40-4	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	59.80	61.00	5751	6326	2.57
50-4	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	75.10	76.60	9055	9960	4.30
60-4	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	94.40	96.10	12971	14268	6.21
80-4	1"	25.40	15.75	15.88	24.00	3.25	7.92	121.00	124.40	23127	25439	10.37
100-4	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	147.80	152.10	36097	39707	15.60
120-4	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	187.00	190.80	51801	56981	23.56
50-5	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	93.20	94.70	11319	12451	5.37
60-5	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	117.00	118.80	16213	17835	7.75
80-5	1"	25.40	15.75	15.88	24.00	3.25	7.92	149.90	153.70	28908	31799	12.96
100-5	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	183.60	187.90	45122	49634	19.46
120-5	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	232.30	236.10	64751	71226	29.40
50-6	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	111.30	112.80	13582	14941	6.43
60-6	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	139.80	141.80	19456	21393	9.31
80-6	1"	25.40	15.75	15.88	24.00	3.25	7.92	179.20	183.00	34690	38159	15.50
100-6	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	219.40	223.70	54146	59561	23.36

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.