



CADENAS DE RODILLOS NORMA BS



CANDADOS




MEDIO PASO



CADENAS REMACHADA



CADENAS CON PASADOR

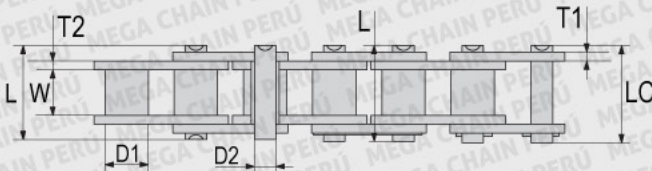

CADENA N°	Paso		Interior	Rodillo	Placa			Pin			*Carga Admisible	Carga a la Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Espesor	Diámetro	Long.	Long. Máx.			
	pulgadas	mm	mm	mm	H (mm)	T1 (mm)	T2 (mm)	D (mm)	L (mm)	LC (mm)			
05B-1	0.315"	8.00	3.00	5.00	7.10	0.80	0.80	2.31	8.20	8.90	510	602	0.20
06B-1	3/8"	9.525	5.72	6.35	8.20	1.30	1.30	3.28	13.15	14.10	918	1060	0.41
08B-1	1/2"	12.70	7.75	8.51	11.80	1.60	1.60	4.44	16.70	18.20	1835	1978	0.69
10B-1	5/8"	15.88	9.65	10.16	14.70	1.70	1.70	5.06	19.50	20.90	2284	2804	0.93
12B-1	3/4"	19.05	11.68	12.07	16.00	1.85	1.85	5.72	22.50	24.20	2957	3283	1.15
16B-1	1"	25.40	17.02	15.88	21.00	3.10	4.15	8.27	36.10	37.40	6118	7862	2.71
20B-1	1 1/4"	31.75	19.56	19.05	26.40	3.50	4.50	10.18	41.30	45.00	9687	11502	3.70
24B-1	1 1/2"	38.10	25.40	25.40	33.20	4.80	6.00	14.62	53.40	57.80	16315	18151	7.10
28B-1	1 3/4"	44.45	31.00	27.94	36.70	6.00	7.50	15.90	65.10	69.50	20394	24106	8.50
32B-1	2"	50.80	31.00	29.21	42.00	6.00	7.00	17.81	66.00	71.00	25493	28297	10.25
40B-1	2 1/2"	63.50	38.10	39.37	52.96	8.00	8.50	22.89	82.20	89.20	36199	40176	16.35
48B-1	3"	76.20	45.72	48.26	63.80	10.00	12.00	29.24	99.10	107.00	57103	63385	25.00

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.

CADENAS DE RODILLOS NORMA BS

CADENA N°	Paso		Interior	Rodillo	Placa			Pin			*Carga Admisible	Carga a la Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Espesor	Diámetro	Long.	Long. Máx.			
	pulgadas	mm	mm	mm	H (mm)	T1 (mm)	T2 (mm)	D (mm)	L (mm)	LC (mm)			
05B-2	0.315"	8.00	3.00	5.00	7.10	0.80	0.80	2.31	13.90	14.50	795	1040	0.33
06B-2	3/8"	9.525	5.72	6.35	8.20	1.30	1.30	3.28	23.40	24.40	1723	1907	0.77
08B-2	1/2"	12.70	7.75	8.51	11.80	1.60	1.60	4.44	31.00	32.20	3263	3946	1.34
10B-2	5/8"	15.88	9.65	10.16	14.70	1.70	1.70	5.06	36.10	37.50	4538	5731	1.84
12B-2	3/4"	19.05	11.68	12.07	16.00	1.85	1.85	5.72	42.00	43.60	5894	6740	2.31
16B-2	1"	25.40	17.02	15.88	21.00	3.10	4.15	8.27	68.00	69.30	10809	15510	5.42
20B-2	1 1/4"	31.75	19.56	19.05	26.40	3.50	4.50	10.18	77.80	81.50	17335	23351	7.20
24B-2	1 1/2"	38.10	25.40	25.40	33.20	4.80	6.00	14.62	101.70	106.20	28552	32549	13.40
28B-2	2 3/4"	44.45	31.00	27.94	36.70	6.00	7.50	15.90	124.60	129.10	36709	41481	16.60
32B-2	2"	50.80	31.00	29.21	42.00	6.00	7.00	17.81	124.60	129.60	45887	51852	21.00
40B-2	2 1/2"	63.50	38.10	39.37	52.96	8.00	8.50	22.89	154.50	161.50	64241	72592	32.00
48B-2	3"	76.20	45.72	48.26	63.80	10.00	12.00	29.24	190.40	198.20	101970	115226	50.00
05B-3	0.315"	8.00	3.00	5.00	7.10	0.80	0.80	2.31	19.50	20.20	1132	1407	0.48
06B-3	3/8"	9.525	5.72	6.35	8.20	1.30	1.30	3.28	33.50	34.60	2539	3069	1.16
08B-3	1/2"	12.70	7.75	8.51	11.80	1.60	1.60	4.44	45.10	46.10	4844	5894	2.03
10B-3	5/8"	15.88	9.65	10.16	14.70	1.70	1.70	5.06	52.70	54.10	6801	8616	2.77
12B-3	3/4"	19.05	11.68	12.07	16.00	1.85	1.85	5.72	61.50	63.10	8841	10381	3.46
16B-3	1"	25.40	17.02	15.88	21.00	3.10	4.15	8.27	99.80	101.20	16315	23157	8.13
20B-3	1 1/4"	31.75	19.56	19.05	26.40	3.50	4.50	10.18	114.20	117.90	25493	34089	10.82
24B-3	1 1/2"	38.10	25.40	25.40	33.20	4.80	6.00	14.62	150.10	154.60	43337	50271	20.10
28B-3	3 3/4"	44.45	31.00	27.94	36.70	6.00	7.50	15.90	184.20	188.70	54044	62151	24.92
32B-3	2"	50.80	31.00	29.21	42.00	6.00	7.00	17.81	183.20	188.20	68320	78568	31.56
40B-3	2 1/2"	63.50	38.10	39.37	52.96	8.00	8.50	22.89	226.80	233.80	96872	111402	48.10
48B-3	3"	76.20	45.72	48.26	63.80	10.00	12.00	29.24	281.60	289.40	152955	174369	75.00

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.