



CADENAS DE PLACAS SERIE BL

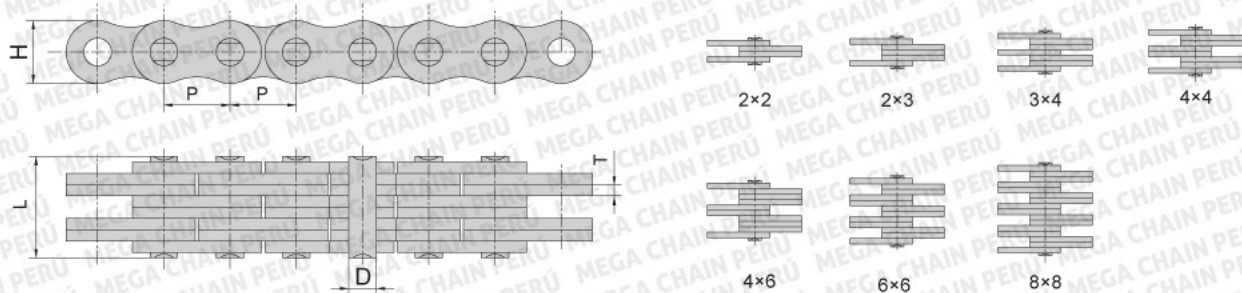

CHAIN N°	Juego	Paso		Placa		Pin		*Carga Admisible	Carga de Rotura	Peso Aprox.
		P		Altura	Esesor	Diámetro	Longitud			
		pulgadas	mm	H (mm)	T (mm)	D (mm)	L (mm)			
BL422	2x2						11.05	2264	2814	0.6
BL423	2x3						13.16	2264	2814	0.75
BL434	3x4						17.40	3406	4222	1.05
BL444	4x4	1/2"	12.70	12.07	2.03	5.09	19.51	4538	5710	1.20
BL446	4x6						23.75	4538	5710	1.46
BL466	6x6						27.99	6801	8331	1.77
BL488	4x4						36.45	9075	11156	2.32
BL522	2x2						12.90	3406	4395	0.90
BL523	2x3						15.37	3406	4395	1.10
BL534	3x4						20.32	4986	6689	1.50
BL544	4x4	5/8"	15.875	15.09	2.42	5.96	22.78	6801	8616	1.80
BL546	4x6						27.74	6801	8616	2.20
BL566	6x6						32.69	10207	12756	2.65
BL588	8x8						42.57	13603	17284	3.50
BL622	2x2						17.37	4986	6954	1.50
BL623	2x3						20.73	4986	6954	1.80
BL634	3x4						27.43	7709	10483	2.50
BL644	4x4	3/4"	19.05	18.11	3.25	7.94	30.78	9983	13960	2.90
BL646	4x6						37.49	9983	13960	3.60
BL666	6x6						44.20	14969	21842	4.30
BL688	8x8						57.61	19956	22199	5.80
BL822	2x2						21.34	8616	11033	2.40
BL823	2x3						25.48	8616	11033	3.00
BL834	3x4						33.76	13154	17335	4.20
BL844	4x4	1"	25.40	24.13	4.00	9.54	37.90	17233	21883	4.80
BL846	4x6						46.18	17233	21883	6.00
BL866	6x6						54.46	25860	33089	7.20
BL888	8x8						71.02	34476	44122	9.60

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.

CADENAS DE PLACAS SERIE BL

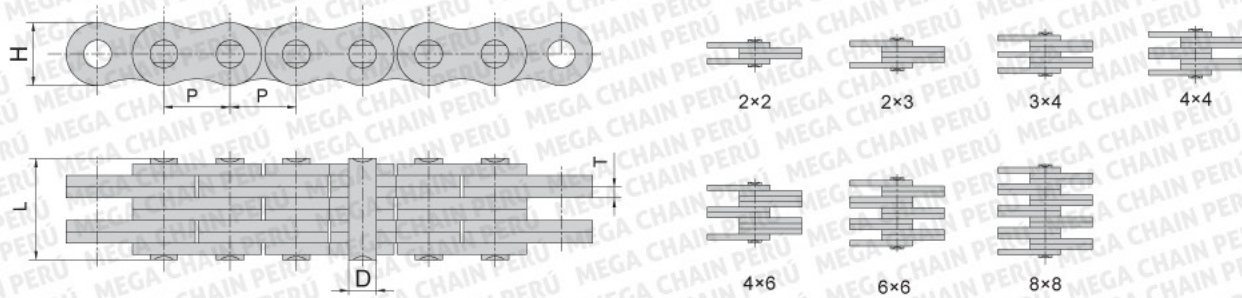

CHAIN N°	Juego	Paso		Placa		Pin		*Carga Admisible	Carga de Rotura	Peso Aprox.
		P		Altura	Espesor	Diámetro	Longitud			
		pulgadas	mm	H (mm)	T (mm)	D (mm)	L (mm)			
BL1022	2x2						25.37	11788	16907	3.57
BL1023	2x3						30.33	11788	16907	4.45
BL1034	3x4						40.23	18599	25360	6.19
BL1044	4x4	1 - 1/4"	31.75	30.18	4.80	11.11	45.19	23586	30958	7.04
BL1046	4x6						55.09	23586	30958	8.77
BL1066	6x6						65.00	35384	44224	10.50
BL1088	8x8						84.81	47171	61600	14.00
BL1222	2x2						29.62	15418	19578	4.96
BL1223	2x3						35.43	15418	19578	6.16
BL1234	3x4						47.07	24942	32212	8.55
BL1244	4x4	1 - 1/2"	38.10	36.20	5.60	12.71	52.88	30846	38861	9.76
BL1246	4x6						64.52	30846	38861	12.16
BL1266	6x6						76.15	46264	55431	14.61
BL1288	8x8						99.42	61692	74030	19.36
BL1422	2x2						33.55	19507	23015	6.89
BL1423	2x3						40.16	19507	23015	8.55
BL1434	3x4						53.37	32202	45713	11.61
BL1444	4x4	1 - 3/4"	44.45	42.24	6.40	14.29	59.97	39014	46009	13.24
BL1446	4x6						73.18	39014	46009	16.51
BL1466	6x6						86.39	58969	69584	19.79
BL1488	8x8						112.80	78017	92059	26.35
BL1622	2x2						39.01	29480	34782	8.78
BL1623	2x3						46.58	29480	34782	10.90
BL1634	3x4						61.72	44908	52984	15.15
BL1644	4x4	2"	50.80	48.26	7.20	17.46	69.29	58510	69380	17.27
BL1646	4x6						84.43	58969	69380	21.53
BL1666	6x6						99.57	87429	102041	25.88
BL1688	8x8						129.84	117928	139148	34.29

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.