


CADENAS DE RODILLOS REFORZADAS ASA - TIPO H

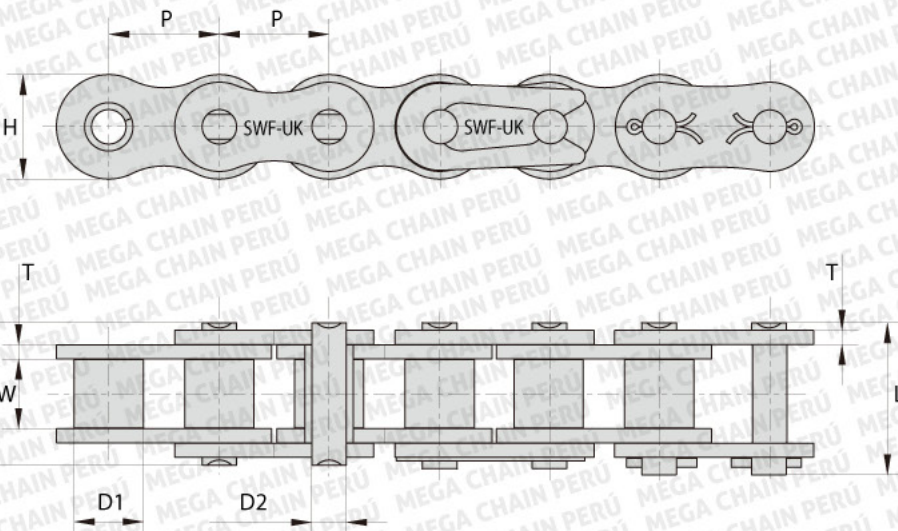

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga admisible	Carga de Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Long.	Long. Máj.	kg/m	kg/m	kg/m
	in	mm	mm	mm	H(mm)	T(mm)	D2 (mm)	L (mm)	LC (mm)			
35H-1	3/8"	9.525	4.77	5.08	9.00	1.50	3.58	13.30	14.30	806	1101	0.41
40H-1	1/2"	12.700	7.85	7.95	12.00	2.03	3.96	18.80	19.90	1438	1948	0.82
50H-1	5/8"	15.875	9.40	10.16	15.09	2.42	5.08	22.10	23.40	2264	3079	1.25
60H-1	3/4"	19.050	12.57	11.91	18.00	3.25	5.94	29.20	31.00	3243	4354	1.87
80H-1	1"	25.400	15.75	15.88	24.00	4.00	7.92	36.20	37.70	5782	7281	3.10
100H-1	1 1/4"	31.750	18.90	19.05	30.00	4.80	9.53	43.60	46.90	9024	11461	4.52
120H-1	1 1/2"	38.100	25.22	22.23	35.70	5.60	11.10	53.50	57.50	12950	16407	6.60
140H-1	1 3/4"	44.450	25.22	25.40	41.00	6.40	12.70	57.60	62.20	17580	22158	8.30
160H-1	2"	50.800	31.55	28.58	47.80	7.20	14.27	68.20	73.00	23127	29143	10.30
180H-1	2 1/4"	57.150	35.48	35.71	53.60	8.00	17.46	75.90	81.60	28654	34853	14.83
200H-1	2 1/2"	63.500	37.85	39.68	60.00	9.50	19.85	86.60	93.50	36077	45326	19.16
240H-1	3"	76.200	47.35	47.63	72.30	12.70	23.81	109.60	115.90	52035	63476	30.40

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.