
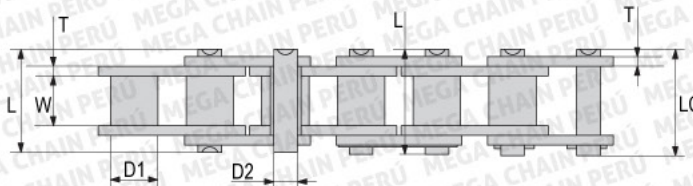


CADENA DE RODILLOS ASA INOXIDABLE

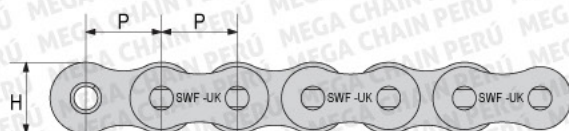

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga admisible	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Longitud	Longitud Máx.		
	pulgadas	mm	mm	mm	H (mm)	T (mm)	D2 (mm)	L (mm)	LC (mm)		
SS25-1	1/4"	6.35	3.18	3.30	6.00	0.80	2.31	7.90	8.40	90	0.14
SS35-1	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	12.40	13.17	190	0.33
SS40-1	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	16.60	17.80	320	0.63
SS50-1	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	20.70	22.20	500	1.01
SS60-1	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	25.90	27.70	740	1.44
SS80-1	1"	25.40	15.75	15.88	24.00	3.25	7.92	32.70	35.00	1260	2.52
SS100-1	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	40.40	44.70	1820	3.74
SS120-1	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	50.30	54.30	2730	6.08
SS35-2	3/8"	9.53	4.77	5.08	9.00	1.30	3.58	22.50	23.30	370	0.69
SS40-2	1/2"	12.70	7.85	7.95	12.00	1.50	3.96	31.00	32.20	630	1.27
SS50-2	5/8"	15.88	9.40	10.16	15.09	2.03	5.08	38.90	40.40	980	2.07
SS60-2	3/4"	19.05	12.57	11.91	18.00	2.42	5.94	48.80	50.50	1470	3.04
SS80-2	1"	25.40	15.75	15.88	24.00	3.25	7.92	62.70	64.30	2520	5.30
SS100-2	1 1/4"	31.75	18.90	19.05	30.00	4.00	9.53	76.40	80.50	3640	7.99
SS120-2	1 1/2"	38.10	25.22	22.23	35.70	4.80	11.10	95.80	99.70	5460	11.90

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.