



CADENAS DE EJE HUECO INOXIDABLES SERIE HP

PASO ESTANDAR

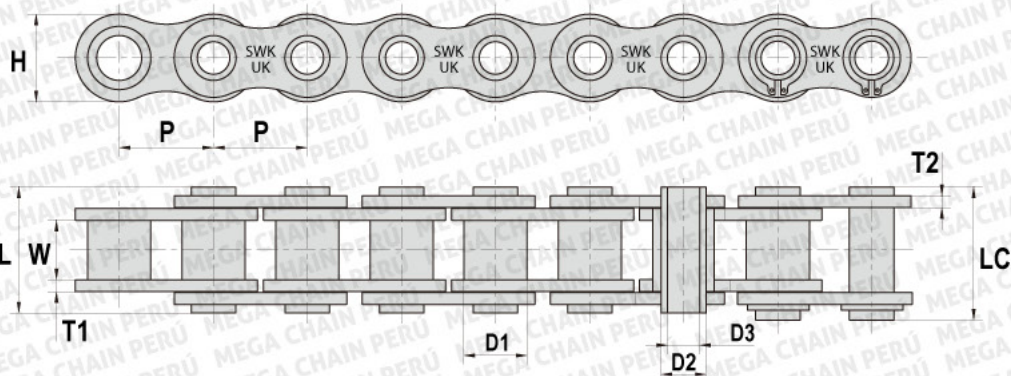

PASO DOBLE

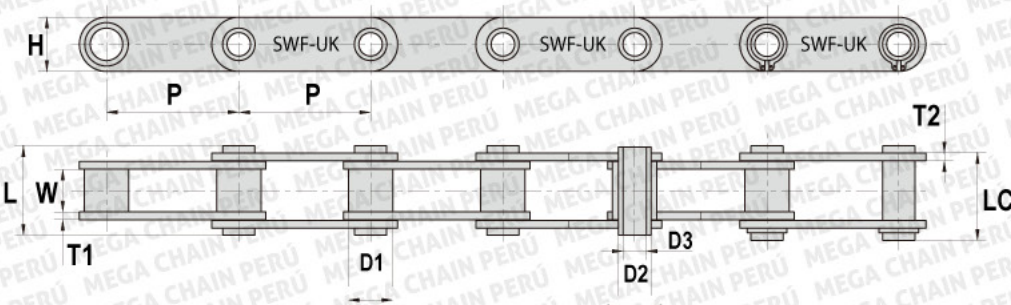

CADENA N°	Paso		Interior	Rodillo	Placa		Pin				*Carga Admisible	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Ø Huevo	Longitud	Long. Máx.	kg/m	kg/m
	in	mm	mm	mm	H (mm)	T1/T2 (mm)	D2 (mm)	D3 (mm)	L (mm)	LC (mm)		
08BHP SS	1/2"	12.700	7.75	8.51	11.80	1.60	6.55	4.50	16.40	-	785	0.56
08BHPF SS	1/2"	12.700	7.75	8.51	11.80	1.60/1.30	6.55	4.50	16.40	17.6	795	0.50
08BHPF5 SS	1/2"	12.700	7.75	8.51	12.00	1.60	6.30	4.50	16.80	18	683	0.63
C08BHP SS	1/2"	12.700	7.75	8.51	11.80	1.60/1.30	6.55	4.50	16.40	17.6	785	0.62
40HP SS	1/2"	12.700	7.85	7.95	12.00	1.50	5.63	4.00	16.50	17.6	785	0.55
50HP SS	5/8"	15.875	9.40	10.16	15.09	2.03	7.03	5.13	20.70	21.9	1428	0.92
10BHPF3 SS	5/8"	15.875	9.65	10.16	14.70	1.70	7.02	5.13	19.05	20.5	714	0.87
60HP SS	3/4"	19.050	12.70	11.91	18.00	2.42	8.31	6.00	25.80	26.8	1713	1.31
60HPF6 SS	3/4"	19.050	12.70	11.91	18.00	2.42	8.31	5.00	25.80	26.8	1530	1.40
80HP SS	1"	25.400	15.75	15.88	24.00	3.25	11.40	8.05	32.50	33.8	3569	2.29
C2040HP SS	1"	25.400	7.85	7.95	12.00	1.50	5.63	4.00	16.50	17.6	7852	0.47
HB25.4F10 SS	1"	25.400	9.40	10.16	14.95	20.30	7.22	5.12	20.50	21.8	1224	0.84
C2050HP SS	1 1/4"	31.750	9.40	10.16	15.00	2.03	7.22	5.12	20.50	21.8	1458	0.77
C2060HP SS	1 1/2"	38.100	12.70	11.91	17.00	2.42	8.31	6.00	25.80	26.8	1713	1.03
HP50F10 SS	1.969	50.000	12.00	18.00	30.00	3.00	8.30	8.30	39.50	40.6	3059	2.71
C2080HP SS	2"	50.800	15.75	15.88	24.00	3.25	11.40	8.05	32.50	33.8	3569	1.83

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.