


CADENA PASO LARGO INOXIDABLE

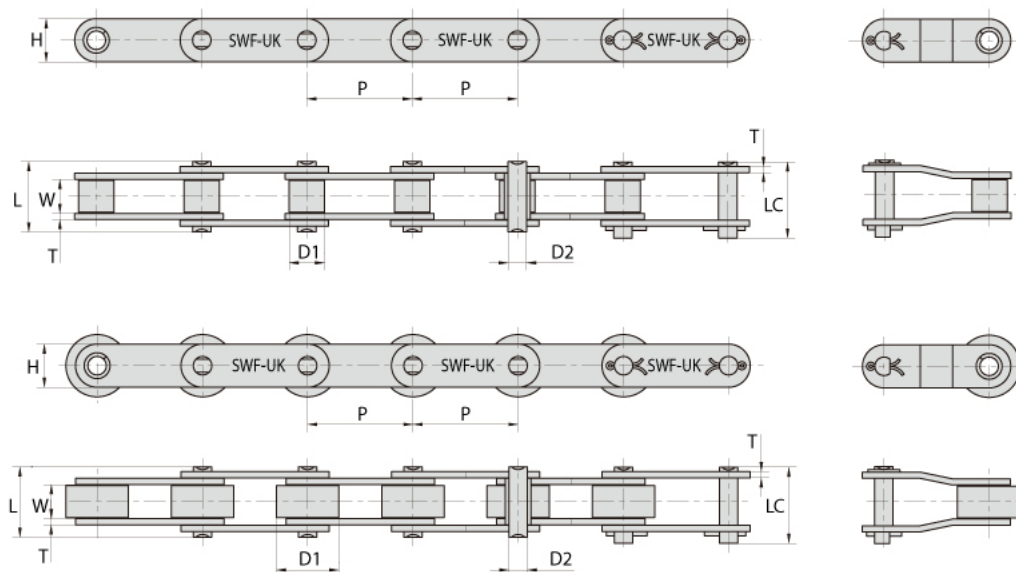

CADENA N°	Paso		Interior	Rodillo	Placa		Pin			*Carga a la Rotura	Peso Aprox.
	P		W	D1	Altura	Espesor	Diámetro	Long.	Long. Máx.		
	in	mm	mm	mm	H (mm)	T (mm)	D2 (mm)	L (mm)	LC (mm)		
C2040 SS	1"	25.40	7.85	7.95	12.00	1.50	3.96	16.60	17.80	979	0.51
C2042 SS				15.88							0.85
C2040H SS	1"	25.40	7.85	7.95	12.00	2.03	3.96	18.80	19.90	979	0.66
C208B SS	1"	25.40	7.75	8.51	11.80	1.60	4.45	16.70	18.20	1224	0.56
C208BL SS				15.88							0.90
C2050 SS	1 1/4"	31.75	9.40	10.16	15.00	2.03	5.08	20.70	22.20	1550	0.79
C2052 SS				19.05							1.29
C210B SS	1 1/4"	31.75	9.65	10.16	14.70	1.70	5.08	19.50	20.90	1356	0.75
C2060 SS	1 1/2"	38.10	12.57	11.91	18.00	2.42	5.94	25.90	27.70	2213	1.13
C2062 SS				22.23							1.63
C2060H SS	1 1/2"	38.10	12.57	11.91	18.00	3.25	5.94	29.20	31.60	2214	1.46
C2062H SS				22.23							2.10
C212B SS	1 1/2"	38.10	11.68	12.07	16.00	1.85	5.72	22.50	25.20	1886	0.89
C2080 SS	2"	50.80	15.75	15.88	24.00	3.25	7.92	32.70	36.50	3967	2.11
C2082 SS				28.58							3.16
C2080H SS	2"	50.80	15.75	15.88	24.00	4.00	7.92	36.20	39.40	3968	2.57
C2082H SS				28.58							3.63
C216B SS	2"	50.80	17.02	15.88	21.00		8.28	36.10	39.10	4079	2.10
C2100 SS	2 1/2"	63.50	18.90	19.05	30.00	4.00	9.53	40.40	44.70	6118	3.05
C2102 SS				39.67							4.89
C2100H SS	2 1/2"	63.50	18.90	19.05	30.00	4.80	9.53	43.60	46.90	6119	3.61
C2102H SS				39.67							5.45
C220B SS	2 1/2"	63.50	20.56	19.05	26.40	4.50/3.50	10.19	41.30	45.00	5812	2.93

* La carga de trabajo ideal es el 20% de la capacidad de carga admisible.